

# INSTALLATION INSTRUCTION FOR 4321-577

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

READ AND SAVE THESE INSTRUCTIONS

## PREPARATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture and all mounting hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

## ASSEMBLING THE FIXTURE (Fig.1)

3. Determine the desired hanging height and thread rods (F, G, H, and I) to the nipple (E). Pass wires carefully through each rod as you assemble.

## MOUNTING THE FIXTURE (Fig.1)

4. Attach circular strap (A) to the junction box with the junction box screws (B) (Size: #8-32\*0.6"L). The side of the circular strap marked "GND" must face out.

## CONNECTING THE WIRES (Fig.2)

5. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

6. Raise the canopy (D) to circular strap (A), and then secure with the mounting screws (C) (Size: #8-32\*0.4"L).
7. Place the glass shade (L) and cup (M) over the socket (K) and secure with the socket ring (N) with the wrench (O) provided.
8. Install the light bulb(s) in accordance with the fixture's specifications. **(DO NOT EXCEED THE SPECIFIED WATTAGE!)** **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Return the power to the junction box and test the fixture. Your installation is now complete.

Fig.1

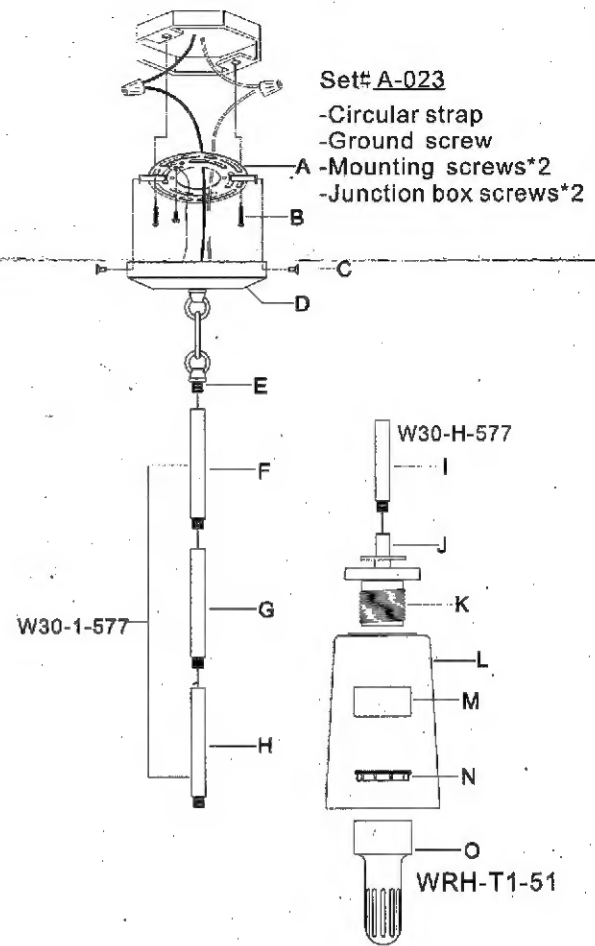


Fig.2

